

ARDEX X 3™

Tile and Stone Mortar

ARDEX X 3 is a Portland cement-based, Polymer-modified tile and stone mortar that mixes to a creamy, easy to apply consistency.

Use to install quarry, ceramic, mosaic and most natural stone tiles over many common interior or exterior surfaces and also can be used for setting porcelain tile over interior, absorbent concrete and other cementitious surfaces. Refer to the technical data sheet.

Key Features

- Interior and exterior use
- For use with in-floor heating systems
- Good bond strength
- Good sag resistance
- Water and frost resistant
- Available in Gray and White

Installation

Packaging:	40 lb. (18 kg) bags
Coverage:	1/4" x 1/4" x 1/4" Sq. Notch Trowel 80 sq. ft (7.9 sq. m)
Open time:	Use to approx. 15 minutes
Working time:	Approx. 15 - 20 minutes
Pot life:	Approx. 3 hours
Time to grout Walls:	8 hours
Time to grout Floors:	24 hours
VOC:	0

Performance




systemONE
warranty

Refer to the technical data sheet at www.ardexamericas.com or call 888-512-7339 prior to installation. For free ARDEX product training click on ARDEX Academy.

For easy-to use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google Play.



ARDEX tile & stone
Installation Systems

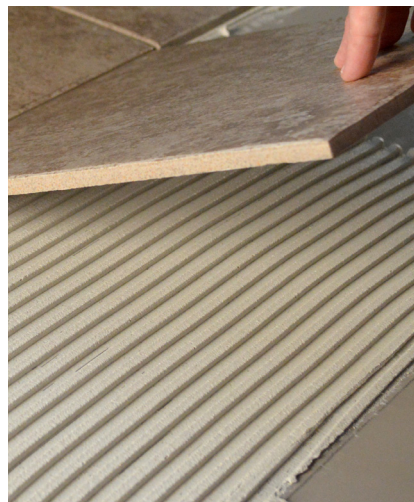

ARDEX MORTARS

ARDEX
AMERICAS

888-512-7339
+1-724-203-5000
www.ardexamericas.com

ATS-287 03/23