


Taking center stage. Outperforming the rest.



- ✓ Superior stain protection*
- ✓ Guaranteed for color uniformity and zero efflorescence**
- ✓ Industry leading grout strength
- ✓ Watch our Power Grout® video at tecpowergrout.com

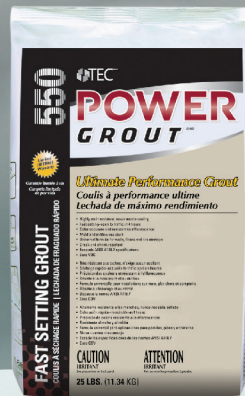

New Mixing Instructions

1. Start with the low-end water range. Add water per instructions. Do not over water.
2. Mix with a drill (350 rpm max.) and mixing paddle attachment for a minimum of 2 minutes. Drill mixing is preferred and provides optimal results – hand mixing will yield acceptable results.
 - Do not add more water until mixture has been mixed for 2 minutes. Product consistency will loosen with mixing. Add water with care not to exceed recommended range. Under conditions that can result a shorter pot life, (i.e. hot weather), mix at the top end of the water range to provide more working time.
3. Allow to slake in bucket for 3-5 minutes
4. Remix with drill and mixing paddle for a minimum of 1 minute

Additional Features and Benefits

- Fast-setting; open to traffic in 4 hours
- For grout joints from 1/16" to 1/2" wide (1.6 mm to 12 mm)
- Residential to Extra Heavy Commercial Applications
- Crack and shrink resistant
- Exceeds ANSI A118.7 specifications
- Interior/exterior use
- Mold and mildew resistant
- Contributes to LEED® project points
- Zero VOC

Mixing

For best results pour water in a bucket and then add powder. In a clean mixing container, add Power Grout® to clean, cool water as specified below:

Size	Water
25 lbs. (11.34 kg)	2.25-2.75 quarts [72-88 fl. oz.] (2.13-2.60 L)
10 lbs. (4.54 kg)	3.6-4.4 cups [28.8-35.2 fl.oz.] (0.85-1.04 L)
7 lbs. (3.18 kg)	2.6-3.1 cups [20.2-24.6 fl. oz.] (596-729 mL)

*Power Grout® is stain proof to most common water based stains when cleaned immediately. The prolonged exposure of any stain will increase the likelihood of permanent staining or discoloration of grout surface.

**For details about the TEC® Power Grout® Limited Lifetime Warranty, contact your sales associate or visit tecspecialty.com.

©Copyright 2018 H.B. Fuller Construction Products Inc.

TEC®, the TEC® logo and Power Grout® are trademarks of H.B. Fuller Construction Products Inc.

FLYTPGMIX R1018-20